


Switching the Setup Microphone

The setup microphone included with the AVR has been changed starting from units produced in May 2025. At the factory, the AVR's internal Dirac parameters are adjusted according to the microphone included in the package.

However, if the original microphone is lost and a replacement is purchased, please follow the steps below to ensure the AVR's internal parameters match the newly acquired microphone.

Procedure

1. With the AVR powered on, press and hold the **"HOME"** button on the front panel, then press the **"ZONE 2 ON/OFF"** button.
Each time you press the "Tone" button, the display on the front panel will toggle between **"OLD"** and **"NEW."**

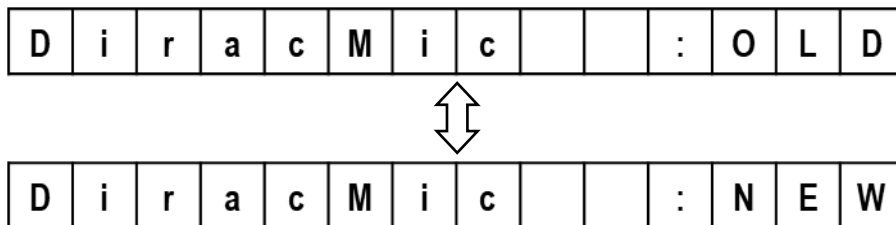

2. Release the setup button as soon as the display indicates which microphone—the original or the new one.

New Microphone (part number: 245052)

Transparent plastic bag



Flat plug



Old Microphone (part number: 245048A)

Red plastic bag



Plug has a groove

